

# THERMAL ANALYZERS



**DSC- 2200 differential scanning calorimeter (DSC)**

## ▶▶ Product introduction:

DSC is designed to determine the inner heat transition relating to temperature and heat flow, it is widely used in the field of polymer development, performance testing & quality control. DSC research and development includes the following field: glass transition temperature, melting point, cold crystallization, crystallization, phase transition, oxidation induction time (OIT).

## ▶▶ Main Features:

- New designed oven structure ensures high resolution and good stability of base line;
- Digital air flow meter may control the air flow rate accurately; the test data can be recorded into the database directly;
- The instrument is bilateral control, may be controlled by both main frame and software. User-friendly interface, easy operation.

## ▶▶ Technical parameters:

DSC range:	0~±500mW
Temperature range:	room temperature ~ 800°C air-cooled - 50 °C ~ 800 °C semiconductor refrigeration - 100 °C ~ 800 °C liquid nitrogen refrigeration
Heating rate:	1 ~ 80 °C / min
Cooling rate:	1 ~ 20 °C / min
Temperature resolution:	0.1 °C
Temperature fluctuations:	±0.1°C
Temperature repeatability:	±0.1°C
DSC noise:	0.01μW
DSC resolution:	0.01μW
DSC accuracy:	0.1μW
DSC sensitivity:	0.1μW
Control Mode:	Rising temperature, constant temperature, cooling temperature (full automatic programmed control)
Curve scanning:	Rising scan, cooling scan
Atmosphere control:	Embedded digital flow meter & Software control
Display:	liquid crystal display (LCD)
Data interface:	RS232 interface
Parameter standard:	equipped with standard material (indium, tin, and lead), the user may correct temperature and heat enthalpy

Note: \* for selecting projects, all technical indicators can be adjusted according to customers' demand

▶▶ **DSC-2335 differential scanning calorimeter (DSC)**



▶▶ **Product introduction:**

Measure and research the following characteristics of material:

Melting and crystallization, glass transition, thermal stability, oxidation induction period OIT, the polycrystalline compatibility, reaction heat, enthalpy and melting point of material, thermal stability, crystallinity, phase transition, specific heat, the liquid and crystal changes, curing degree, reaction kinetics, purity, identification of materials, etc.

▶▶ **Technical parameters:**

DSC range:	0~±500mW
Temperature range:	room temperature ~ 800°C air-cooled - 30 °C ~ 800 °C semiconductor refrigeration - 100 °C ~ 800 °C liquid nitrogen refrigeration
Heating rate:	1 ~ 80 °C / min
Cooling rate:	1 ~ 20 °C / min
Temperature resolution:	0.1 °C
Temperature fluctuations:	±0.1°C
Temperature repeatability:	±0.1°C
DSC noise:	0.01μW
DSC resolution:	0.01μW
DSC accuracy:	0.1μW
DSC sensitivity:	0.1μW
Temperature-control and means:	Rising temperature, cooling temperature, constant temperature (full automatic programmed control)
Curve scanning:	warming scanning, cooling scanning
Atmosphere control:	static or dynamic atmosphere, gas flow control device
Display:	Big LCD screen (LCD)
Data interface:	RS232 interface, special software (not regular free upgrades)
Parameter standard:	With standard materials (indium, tin, lead), User can correct the temperature and heat content according to requirements

Remarks: the selective matching items, All of the technical specifications can be adjusted according to customers' requirements

▶▶ **Micro- DSC( micro differential scanning calorimeter)**



▶▶ **Product introduction:**

Trace heat meter is a new kind of analysis instruments showing that the stability of samples changes with temperature. Our company self-developed thermal analyzer series products are mainly oriented to industrial users, scientific research and teaching, widely used in all kinds of materials and product research and development in chemical field, process optimization and new quality inspection, etc,

▶▶ **Technical parameters:**

Temperature Range:	- 10 ~ 200 °C
Scanning rate:	0.01 ~ 10 °C / min
Control mode:	Rising temperature, Cooling temperature, Constant temperature (automatic control),
Display:	characters liquid crystal display (LCD)
Output means:	the microcomputer system, printers
Curve depicting:	supporting intelligent software, realizing automatic recording curve, automatically printing experiment report
Work Power:	AC220V 50Hz
Selecting brand computers:	17-inch LCD 512M RAM 80G hard disk

- Provide irregularly software free upgrades and tracking after-sales service.
- Provide one year consumables.

## ▶▶ TGA- 2100D thermo gravimetric analyzer



### ▶▶ Product introduction:

Thermo gravimetric analysis (TGA) is in TG, temperature, the temperature or cooling process, observe the quality with temperature or the change of time, the purpose is to study material thermal stability and components. Widely used in plastic, rubber, coating, drugs, catalyst, inorganic materials, metal materials and composites fields of research and development, optimizing process and quality control

Measurement and research material following characteristics:

Thermal stability, decomposing process, adsorption and desorption, oxidation and reduction, ingredients quantitative analysis, additives and filler influence, moisture and volatiles, reaction kinetics.

### ▶▶ Technical parameters:

Temperature range:	Room temperature ~1150°C (Can be extended to 1350°C)
Temperature resolution:	0.1°C
Temperature fluctuation:	±0.1°C
Heating rate:	1 ~ 80 °C / min
Cooling rate:	1 ~ 20 °C / min optional cooling system
Temperature control mode:	Rising temperature, Cooling temperature, Constant temperature
The cooling time:	15min (1000°C ~ 100°C)
Balance measuring scope:	1mg~2g (Can be extended to 5g)
Resolution:	0.1µg
Constant temperature and time:	0 ~ 300min (set arbitrarily)
Display:	characters liquid crystal display (LCD)
Atmosphere:	inert, oxidizing, reducible, static and dynamic
Atmosphere device:	Built-in gas flow meter, including switch two way gas and control flow volume
Software:	Intelligent software can record TG curves automatically, Processing data and print experimental statements
Data interface:	RSS - 232 interface, special software (irregularly free upgrades)
Power:	AC220V 50Hz

▶▶ **Micro - TGA micro thermo gravimetric analyzer**



▶▶ **Product introduction:**

Micro - TGA , micro thermo gravimetric analyzer is mostly used in the field of polymer materials, pharmaceutical, food, organic chemistry, etc. It is a powerful tool for the study of the PCB decomposition temperatures, with 0.1 ug ultra-high weighing resolution,

▶▶ **Technical parameters:**

Temperature range:	room temperature - 1000°C
Heating and cooling rate:	0 ~ 60°C/ min
The cooling time:	15min (1000°C ~ 100°C)
Weighing range:	100 mg
Weighing resolution:	0.1µg
Measuring atmosphere:	inert, oxidizing, reducing, static and dynamic

▶▶ **STA – 3200 Synchronous thermal analyzer**



## ►► Product introduction:

Synchronous thermal analysis combines TGA (Thermogravimetric Analysis) with DTA (Differential Thermal Analysis) or DSC (Differential Scanning Calorimetry), in which we can get the information of TG and DTA or DSC in synchrony using the same sample during the same operation.

Measure and research the following characteristics of the materials:

DSC: Melting and crystallization, phase change, reaction temperature and heat, heat of combustion and specific heat capacity, etc

TG : Thermal stability, decomposition, REDOX, adsorption and adsorption, free water and gesso content, ingredients proportion computation, etc

## ►► Technical parameters:

TGA/DSC STA - 3200 Synchronous thermal analyzer	
Temperature range:	Room temperature ~1150°C (Can be extended to 1350°C)
Temperature resolution:	0.1°C
Temperature fluctuation:	±0.1°C
Heating rate:	1 ~ 80 °C / min
Cooling rate:	1 ~ 20 °C / min optional cooling system
Temperature control mode:	Rising temperature, Cooling temperature, Constant temperature
Constant temperature time:	0~300min Can be set arbitrarily
cooling time:	15min(1000°C ~100°C)
Wide range of weighing:	1mg~2g (Can be extended to 5g)
DSC measuring range:	0~±500mW
DSC Resolution:	1μW
Resolution:	0.1μg
Constant temperature and time:	0 ~ 300min Can be set arbitrarily
Display:	liquid crystal display (LCD)
Atmosphere:	Inertia, oxidability, reducibility, static and dynamic
Atmosphere device:	Built-in gas flow meter, including switch two way gas and control flow volume
Software:	Intelligent software can record TG curves automatically, Processing data and print experimental statements
Data interface:	RSS - 232 interface, special software (the software is free upgrades)
Work Power:	AC220V 50Hz

## ▶▶ CBCT 2350 Carbon Black Content Tester



### ▶▶ Introduction:

- This instrument applies to polyethylene, polypropylene and poly DZ3500 Carbon Black Content Tester isobutylene plastics in the determination of the content of carbon.
- The test result is obtained through the specimen under the nitrogen protection, after analyzing the weight of high temperature decomposition.
- This apparatus has many advantages such as being easy to use, simple operation, reliable working, accurate measurement, automatic temperature control and so on.

Testing standard:

GB 13021-1991

GB/T 2951.41-2008

### ▶▶ Technical parameters:

Test temperature:	room temperature ~1000°C
Temperature adjustment:	full-program control (Setting freely)
Display:	Characters LCD Display
Heating tube inner diameter:	Φ31× (400±50) mm

- Overheating protection
- External temperature probe
- Flow meter and regulator
- Silicone connecting pipe
- Burning boat

## ▶▶ DCL 2501 dielectric constant locator






▶▶ **Introduction:**

Medium loss and dielectric constant is an important physical property of materials such as metal oxide, plank, porcelain (pottery), mica, glass, plastics, etc. Through measurement, the various factors of dielectric loss and dielectric constant can be further understood, providing conditions for improving the properties of materials. The equipment is used for applied research of inorganic metal new material properties in scientific research institutions, schools, factories and other institutions.

▶▶ **Technical indicators:**

Q value range classification:	30, 100, 300, 999, automatic transmission
Inductance measuring range:	0.1μH ~ 1H
Capacitance measuring scope:	1 ~ 460pF (capacitance measurement more than 460pF see service regulations)
Accuracy:	+ 0.2 pF.
Oscillation frequency range:	10 kHz ~ 50MHz;
Q qualified instructions Pre-set function, Pre-set range:	5 ~ 999.
Sample size: Thickness:	2 ± 0.5 mm, long * width: > 30mm * 30mm

▶▶ **TCT, thermal conductivity tester(Constant temperature)**

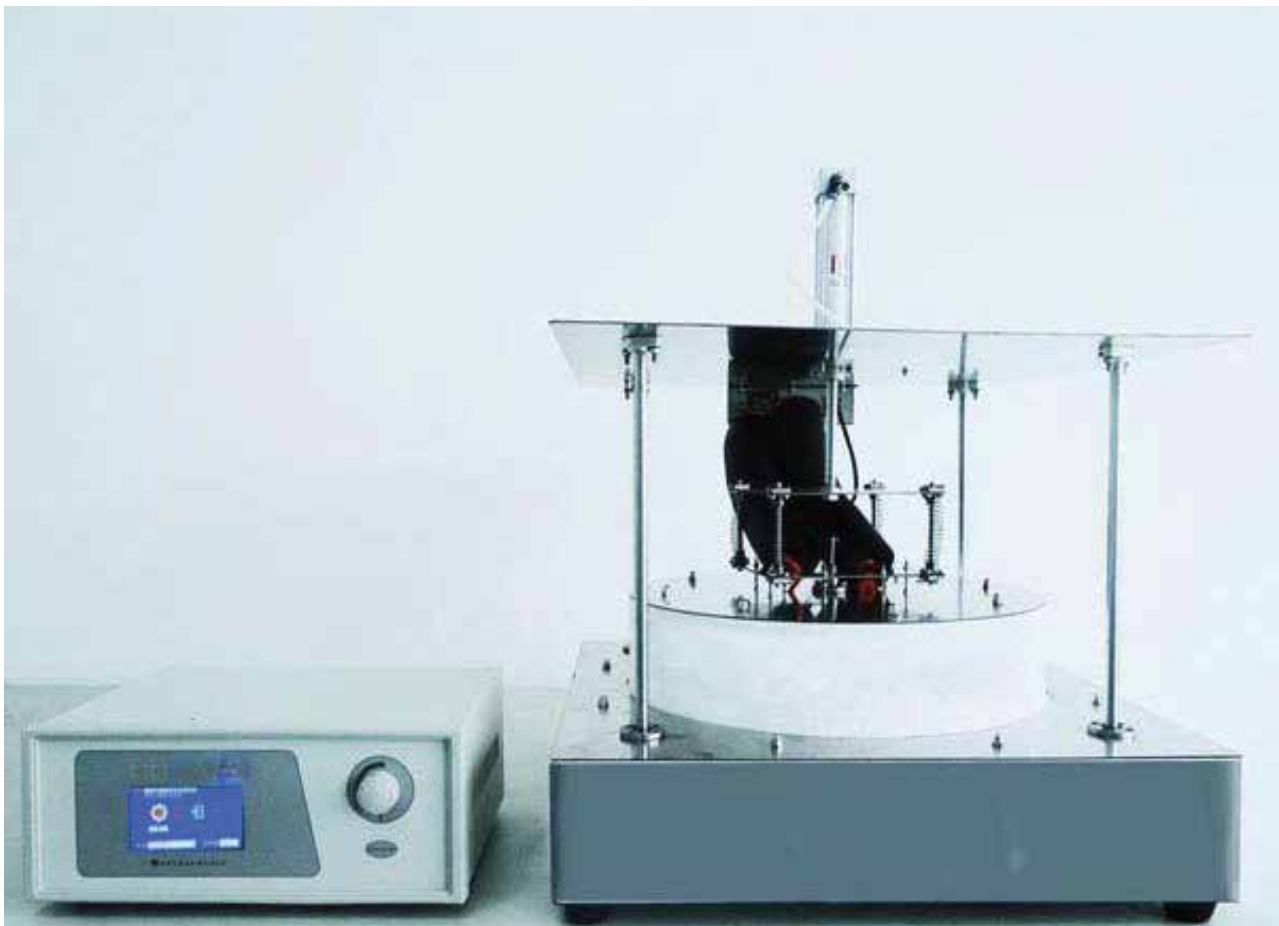

## ►► Introduction:

thermal conductivity meter has many advantages, such as large area of the test sample, variety test materials (single materials or composite materials), high precision temperature control, reliable and steady performance, high degree of automation control, convenient operation, etc.

Test range

**Single material:** foam plastics (other flat surface insulation material, plate), polyurethane, phenol, urea aldehyde, mineral wool (glass cotton, rock wool, mineral wool), cement wall

**Composite materials:** glass composite CRC, cement enhanced polyphony board, sandwich concrete, fiber glass panel composite plate, paper cellular plate

**Technical parameters**

Biggest test pieces size

Long \* width \* thick: 300 \* 300 \* 50mm

**The precision of temperature control:** 0.05°C

**Resolution:** 0.01°C

**The maximum hot plate set temperature:** 80°C

**Minimum of cooling-plate set temperature:** room temperature

**Measuring precision:** 3%

**Coefficient of thermal conductivity measuring range:** 0.010 ~ 5.000 w (k.m)

**Power supply:** AC 220V

## ►► Instrument characteristics:

- The surface temperature is even and accurate.  
Using large block purple COINS as Temperature profile board in the design to improve the consistency of the surface temperature of the test sample.
- Advanced control system.  
It can control the temperature quickly and steadily.
- Friendly human-machine interface  
Both cold and hot plate temperature and heat flux power can be intuitively displayed by large screen LCD.
- Simple operation.  
Electric mobile splint and clamping force LCD can be adjusted,  
Insulation door can be shut down automatically after sample installation in place
- Intelligent data processing.  
Highly automated computer data communication and report processing system,  
Flat thermal conductivity meter has computer communication interface, which can display temperature curve in real time.
- Automatically generate test report and print.

There are test records, data processing and report format in the software, which can issue the experiment report automatically.

## HPLC Servicing, Validation, Trainings and Preventive Maintenance :

**HPLC Servicing** :HPLC Servicing : We have team of service engineers who can attend to any make of HPLC promptly @the most affordable cost.

**Trainings** :We also take up preventive Maintenance to reduce downtime of HPLC's Trainings.

**AMC's/CMC** :AMC's/CMC :We offer user training both in-House and at customer sites on HPLC principles, operations, trouble-shooting.

**Validations** :Validations :We have protocols for carrying out periodic Validations as per GLP/GMP/USFDA norms.

**Instruments** :Instruments :We offer instruments/Renting Services Modules like pumps,detector etc. on Rent.



## About Analytical Technologies

Analytical Technologies is synonymous for offering technologies for doing analysis and is the Fastest Growing Global Brand having presence in at least 96 countries across the global. Analytical Technologies Limited is an ISO:9001 Certified Company engaged in Designing, Manufacturing, Marketing & providing Services for the Analytical, Chromatography, Spectroscopy, Bio Technology, Bio Medical, Clinical Diagnostics, Material Science & General Laboratory Instrumentation. Analytical Technologies, India has across the Country operations with at least 4 Regional Offices, 6 Branch Offices & Service Centers. Distributors & Channel partners worldwide.

## Our Products & Technologies




UV/VIS  
Spectro 2080+  
Double Beam



Infra FTIR



Optima Gas  
Chromatograph  
3007



Optima Gas  
Chromatograph  
2979 Plus



Flash  
Chromatograph



Atomic Absorption  
Spectrophotometer



Liquid Particle  
Counter



Optical Emission  
Spectrophotometer



DSC/TGA



Semi Auto Bio  
Chemistry Analyzer



HEMA 2062  
Hematology  
Analyzer



Micro Plate  
Reader/Washer



URINOVA 2800  
Urine Analyzer



Total Organic  
Carbon 3800



Fully Automated  
CLIA



NOVA-2100  
Chemistry Analyzer



PCR/Gradient PCR/  
RTPCR



TOC  
Analyzer



Laser Particle  
Size Analyzer



Ion Chromatograph



Water purification  
system

## Regulatory compliances



## Corporate Social Responsibility

Analytical Foundation is a nonprofit organization (NGO) found for the purpose of:



# Analytical Foundation

1. Research & Innovation Scientist's awards/QC Professional Award : Quality life is possible by innovation only and the innovation is possible by research only, hence ANALYTICAL FOUNDATION is committed to identify such personalities for their contributions across various field of Science and Technology and awarding them yearly. To participate for award, send us your details of research / testing / publication at [Info@analyticalfoundation.org](mailto:Info@analyticalfoundation.org)

2. Improving quality of life by offering YOGA Training courses, Work shops/Seminars etc.

3. ANALYTICAL FOUNDATION aims to DETOXIFY human minds,souls and body by means of yoga, Meditation, Ayurveda, Health Care, Awards, Media, Events, Camps etc.

## Reach us @



HPLC Solutions   MultipleLabs   Analytical Bio-Med   Analytical Distributors   Analytical Foundation (Trust)

**Corporate & Regd. Office:**  
Analytical House, # E67 & E68,  
Ravi Park, Vasna Road, Baroda,  
Gujarat 390 015. INDIA

T: +91 265 2253620  
+91 265 2252839  
+91 265 2252370  
F: +91 265 2254395

E: [info@hplctechnologies.com](mailto:info@hplctechnologies.com)  
[info@multiplelabs.com](mailto:info@multiplelabs.com)  
[info@analyticalgroup.net](mailto:info@analyticalgroup.net)  
[info@analyticalbiomed.com](mailto:info@analyticalbiomed.com)

W. [www.analycalgroup.net](http://www.analycalgroup.net)  
[www.hplctechnologies.com](http://www.hplctechnologies.com)  
[www.multiplelabs.com](http://www.multiplelabs.com)  
[www.ais-india.com](http://www.ais-india.com)

Sales & Support Offices:  
across the country :  
Distributors & Channel  
partners World Wide