


# GS 3268

## Gloss Meter

Low Gloss    Semi Gloss    High Gloss

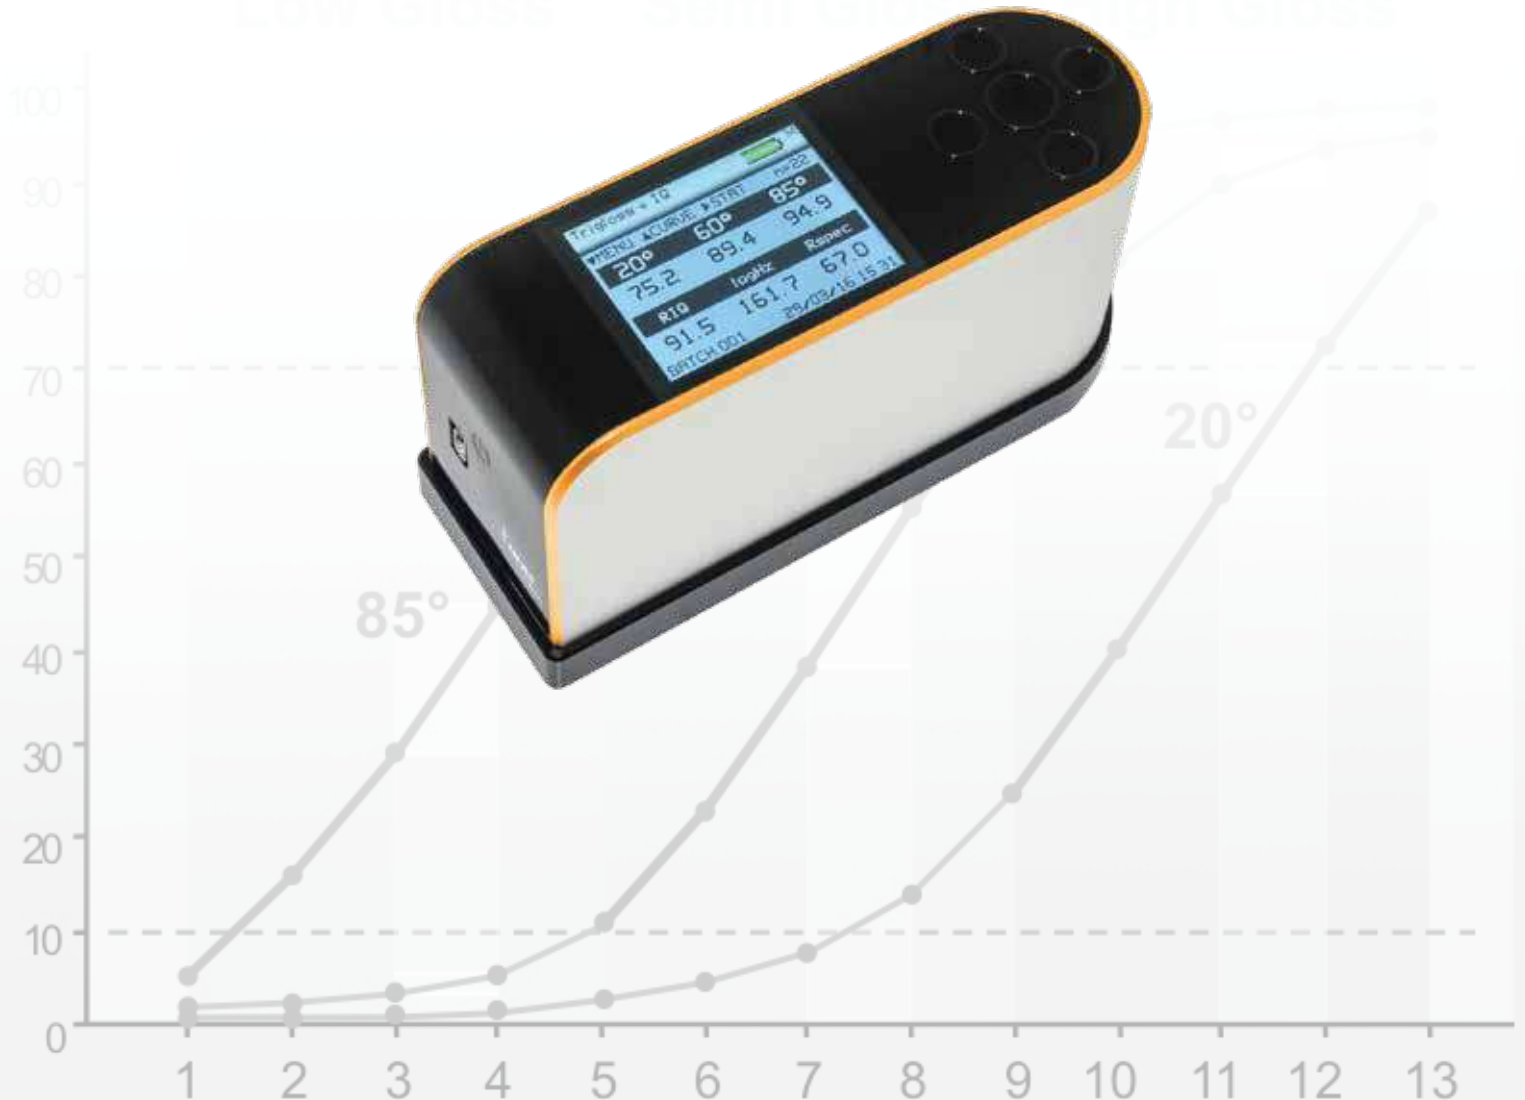

EPC / PRODUCTS / APPLICATION / SOFTWARE / ACCESSORIES / CONSUMABLES / SERVICES

**Analytical Technologies Limited**

An ISO 9001 Certified Company

[www.analyticalgroup.net](http://www.analyticalgroup.net)

The gloss meter universally apply to paint, ink, stoving varnish, coating, wood products; marble, granite, vitrified polished tile, pottery brick and porcelain; plastic, paper; hardware industries, etc. for gloss measurement and gloss data transmission.

►► **Features:**

- 20, 60 and 85° in one: from high to low gloss - have the specified angle on hand.
- One button for all angles measurement at the same location.
- Display 5 sets of measurement data, good for comparison.
- Measuring mode: basic measurement, statistical measurement, continuous measurement, QC measurement (only for GQC6 software).
- Continuous mode to check uniformity over large areas.
- Connect to PC, more extend functions.
- Input gloss value manually.
- Large touch screen operation, easy to use.
- Beauty appearance, good man-machine communication interface.
- Powerful functions to meet many different requirements.
- Large storage to save over 5000 data.
- Built-in lithium ion rechargeable battery.

►► **Specifications:**

GS 3268	Multi-angle Precise Gloss Meter		
Measuring Angle	20°/60°/85° Comply with standard ISO 2813, GB/T 9754, ASTM D 523, ASTM D 2457		
Measuring Area (mm)	20°: 10x10	60°: 9x15	85°: 5x36
Measuring Range	20°:0~2000GU 60°:0~1000GU 85° : 0~160GU		
Division Value	0.1GU		
Measurement Range	0-10GU	10-100GU	100-2000GU
Repeatability	± 0.1GU	± 0.2GU	± 0.2%GU
Reproducibility	± 0.2GU	± 0.5GU	± 0.5%GU
Measurement Standard	Conform with JJG696 first class gloss meter working requirement		
Chromaticity Corresponding	Corresponding with CIE 1931(2°) under CIE C light source		
Errors	±1.2 , ± 1.2%		
Measuring Time	1.0s		

<b>Dimension</b>	L*W*H : 160mm*75mm*90mm
<b>Weight</b>	350g
<b>Language</b>	English
<b>Battery</b>	3200mAh Li-ion Battery , >10000 times(within 8 hours)
<b>Display</b>	TFT 3.5 inch, capacitive touch screen
<b>Interface</b>	USB/RS-232
<b>Storage</b>	Basic mode: 1000; Statistical Mode: 5000, Continuous mode : 5000
<b>Software</b>	GQC6 Quality Control Software with QC report printing functions and more extended functions.

▶▶ Regulatory compliances



▶▶ Corporate Social Responsibility

Analytical Foundation is a Nonprofit Organization (NGO) found for the purpose of:



# Analytical Foundation

1. Research & Innovation Scientist's awards / QC Professional Award: Quality life is possible by innovation only and the innovation is possible by research only, hence ANALYTICAL FOUNDATION is committed to identify such personalities for their contributions across various field of Science and Technology and awarding them yearly. To participate for award, send us your details of research / testing / publication at [info@analyticalfoundation.org](mailto:info@analyticalfoundation.org)

2. Improving quality of life by offering YOGA Training courses, Work shops / Seminars etc.

3. ANALYTICAL FOUNDATION aims to DETOXYFY human minds, souls and body by means of Yoga, Meditation, Ayurveda, Health Care, Awards, Media, Events, Camps etc.

▶▶ Reach us @



HPLC Solutions   MultipleLabs   Analytical Bio-Med   Analytical Distributors   Analytical Foundation (Trust)

**Corporate & Regd. Office:**  
Analytical House, # E67 & E68,  
Ravi Park, Vasna Road, Baroda,  
Gujarat 390 015. INDIA

T: +91 265 2253620  
+91 265 2252839  
+91 265 2252370  
F: +91 265 2254395

E: [info@hplctechnologies.com](mailto:info@hplctechnologies.com)  
[info@multiplelabs.com](mailto:info@multiplelabs.com)  
[info@analyticalbiomed.com](mailto:info@analyticalbiomed.com)

W. [www.ais-india.com](http://www.ais-india.com)  
[www.analyticalgroup.net](http://www.analyticalgroup.net)  
[www.hplctechnologies.com](http://www.hplctechnologies.com)  
[www.multiplelabs.com](http://www.multiplelabs.com)

Sales & Support Offices:  
across the country :  
Distributors & Channel  
partners World Wide

Note : Company reserves rights to add/delete/modify the contents / technical specifications of the catalogue without prior notice.